


STAR

ELECTROMECHANICAL GEAR MOTOR FOR SWING GATES WITH LEAVES UP TO 3 m,
24 Vdc



MODELS

CODE	DESCRIPTION	PCS PALLET
 STAR3024	For swing gates with maximum length 3 m per leaf, pair of irreversible 24 Vdc motors, without encoder (2 pcs, left and right)	21

PLUS

New version without encoder

Easy slowdown and open limit settings

Mechanical parts well protected from external debris

Compatible with control unit CT202 24

Available on kit version

New motor up to 3 m



Sturdy telescopic stem



Robust gears and mechanical parts



New version without encoder



Metallic release system

STAR3024

MECHANICAL DATA

speed	cm/s	2,5
pulling force	N	1400
working cycle	%	80
opening time at 90°	sec	18-25


ELECTRICAL DATA

control board		CT20224
power	Vdc	24
consumption	A	3,5
absorbed power	W	85

GENERIC DATA


protection degree	IP	54
dimensions (L - D - H)	mm	741 - 115 - 177
weight	kg cad	3,2
working temperature	°C	-20 + 55
leaves maximum weight	Kg	400

LIMIT USE

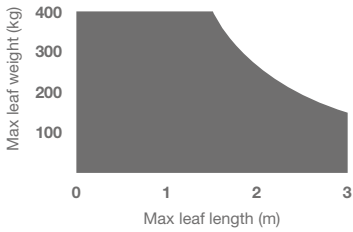





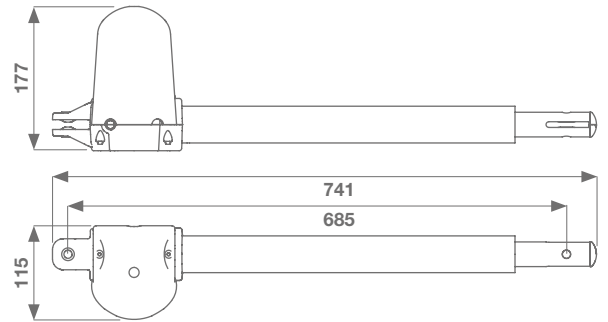

Gate shape and height and weather conditions can considerably reduce the values shown above, in the graph.

DIMENSIONS



ACCESSORIES

					
ELC-C Horizontal 12 V electrolock	KBP Battery back-up kit	KITFIXBATT Fixing brackets for batteries	CT20224 Control unit in box for two 24 Vdc motors	EGS1 Key selector with all-metal body	TS Warning board
PC 1	PC 1	PC 1	PC 1	PC 1	PC 1