

TURBO 400

ELECTROMECHANICAL GEAR MOTOR FOR SLIDING GATES UP TO 4000 Kg, 400 Vac



MODELS

CODE	DESCRIPTION	PCS PALLET
SC400M	For sliding gates up to 4000 Kg, 400 Vac motor, control unit with slowdown and magnetic limit switch. M6 pinion	4

PLUS

Electric brake, to grants safety also on heaviest installations
Easy maintenance thanks to the control unit position

With 400 Vac control unit CT-400
Electronic and mechanical parts well protected from external debris



Anti-UV rays coating



Sturdy and high-performing motor

SC400M

MECHANICAL DATA

speed	cm/s	17
torque	Nm	180
working cycle	%	30*

ELECTRICAL DATA


control board		CT-400
power	Vac	400
consumption	A	2
absorbed power	W	750
thermoprotection	°C	150

GENERIC DATA

protection degree	IP	54
dimensions (L - P - H)	mm	520 - 300 - 585
weight	kg	76
working temperature	°C	-20 + 55
gate maximum weight	Kg	4000

* variable according to the gate weight and dimensions

DIMENSIONS

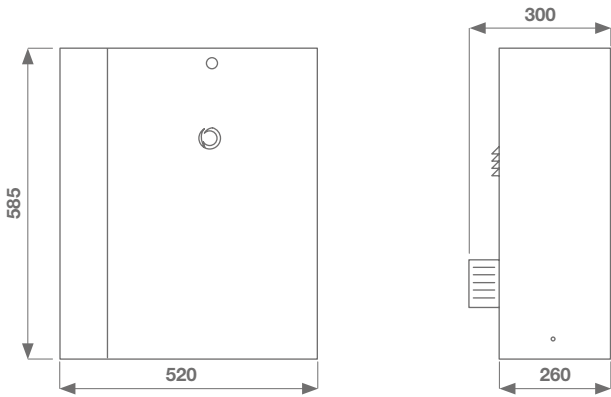

ACCESSORIES



CREM-30 *
M6 zinc coated rack
30x30 mm
L=1000 mm

€/m



TS
Warning board

PC 1

* Pack of 2 pcs